

DYNAWOOD™



EXPERIENCE THE ENERGY. THE POWER.
THE DYNAMIC.


DynaWood™

Performance Criteria	Test Standard	Typical Results
Slip Resistance/Coefficient of Friction	ASTM D2047	>0.8
Chemical Resistance	ASTM F925	Good
Resistance to Light	ASTM F1515	Pass
Flammability - Critical Radiant Flux	ASTM E648	Class I
Flammability - Pill Test	ASTM D2859	Pass
Static Load Limit @250 PSI	ASTM F970	0.007"
Dynamic Rolling Load	ASTM F2753	Pass
G-Max	Clegg	343 avg.
Impact Insulation Class [IIC]*	ASTM E492	55
Delta IIC*	ASTM E2179	23
High Frequency IIC [HIIC]*	ASTM E3222	60

*Tested on a 6" concrete slab with no ceiling.

SIZE:

7mm (2mm + 5mm) x 72" (1.83m)
Weld rod required
Max Roll Length: 65 LF




Force Reduction: 12.1%
Absorption of impact energy


The Dynamic Story:

We are a premiere, full-service contractor specializing only in high performance and multipurpose flooring solutions. An American company, we take pride in delivering products made entirely in the USA in an ISO 9001-2000 certified facility.

We also take pride in our team. We employ the most experienced installation technicians in the industry to install 100+ indoor sports floors and running tracks annually. No subcontractors. And we manufacture, sell and install directly to you, the customer. We believe this is the best way to deliver a better product, plus it allows us to deliver unmatched value pricing! We're led by people who've been champions of this business for 15+ years.

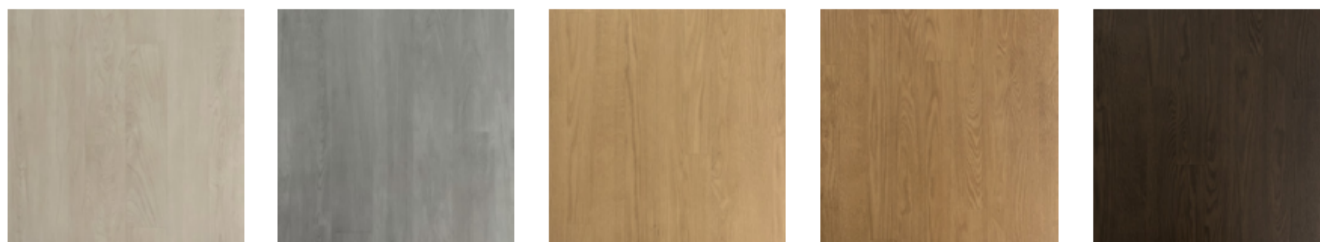

Spike 250 Clutch 251 Slam 252 Varsity 253 Academy 254

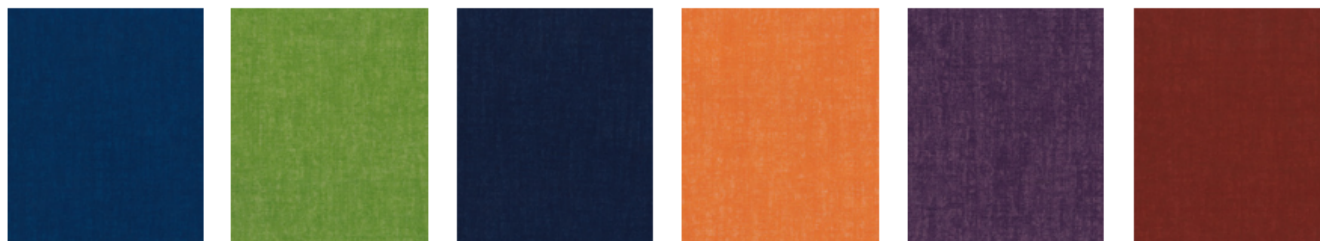

Blue 271 Green 275 Indigo 270 Orange 272 Purple 274 Red 273

Dynamic: Pertaining to energy or power in motion; involving or causing energy, motion, action or change: opposite to static.